

FEATURES

- Vent hole for drain
- · Backelite cover on handle



APPLICATION

- · Hydraulic machines
- · Isolation for gauges
- Compressors

STANDARD SPECIFICATIONS

Type Pattern 1 (2 Way) Material **AISI 316 SS**


1/2" NPT (F) [1/2" NPT (F) x 2 Nos for 3 Way] Instrument connection

Process connection 1/2"NPT (M)

Handle AISI 304 SS with Backelite cover

Gaskets / Seals **PTFE** Maximum working pressure 100 bar Maximum working temperature 180°C


DIMENSIONAL DRAWING

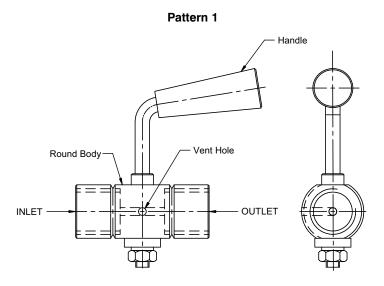

GAUGE COCK



DIMENSIONAL DRAWING

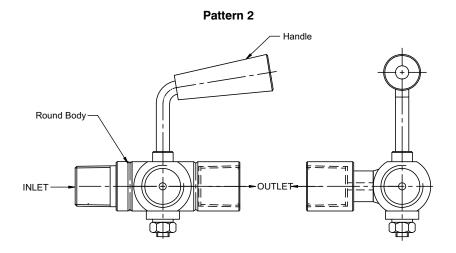

XL

ORDERING CODES

1. TYPE		4
1 2	Pattern 1 (2 Way) Pattern 2 (3 Way)	1
2. MATER	2. MATERIAL	
MC MF MG	AISI 304 SS AISI 316 SS AISI 316L SS	- MF
3. INSTRUMENT CONNECTION		04N
12B 13B 14B 12N 13N 14N 02B 03B 04B 02N 03N 04N	1/4" BSP (M) 3/8" BSP (M) 1/2" BSP (M) 1/4" NPT (M) 3/8" NPT (M) 1/2" NPT (M) 1/4" BSP (F) 3/8" BSP (F) 1/4" NPT (F) 3/8" NPT (F) 1/4" NPT (F) 1/2" NPT (F)	UHIN

4. PROCESS CONNECTION		14N
12B	1/4" BSP (M)	1414
13B	3/8" BSP (M)	
14B	½" BSP (M)	
12N	1/4" NPT (M)	
13N	3/8" NPT (M)	
14N	½" NPT (M)	
02B	1/4" BSP (F)	
03B	3/8" BSP (F)	
04B	½" BSP (F)	
02N	1/4" NPT (F)	
03N	3/8" NPT (F)	
04N	½" NPT (F)	
5. OTHER OPTIONS		— хм
TC	Material test certificate 3.1	AIII
TM	Material test certificate 2.2	
TO	Certification for Oxygen service	
XM	Marking by engraving	
371	M 11 1 1	

Marking by laser

Ordering Example: A101-1-MF-04N-14N-XM